



Retexo Rewind lanyards are a cost-effective combination of the premium Retexo shock absorber and compact rewind lanyards. Robust elastic webbing lanyards have a high elongation ratio (1:2.3). Certified for horizontal use over sharp edges ( $r \geq 0.5$  mm). The Retexo is a next generation energy absorber designed to be particularly light and compact. Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force. With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg. Ideal in situations with limited clearance (<4 m) when used with lanyards with a total length up to 150 cm. Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable. Equipped with NFC TRACK tag for digital identification.

**EDGE TESTED**




Certified for horizontal use over an edge

**DOUBLE + 0981 + 2x2017 115-175 cm**

Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

Retexo absorber with high load capacity: up to 130 kg!

Robust elastic webbing lanyards have a high elongation ratio (1:2.3). Width: 29 mm

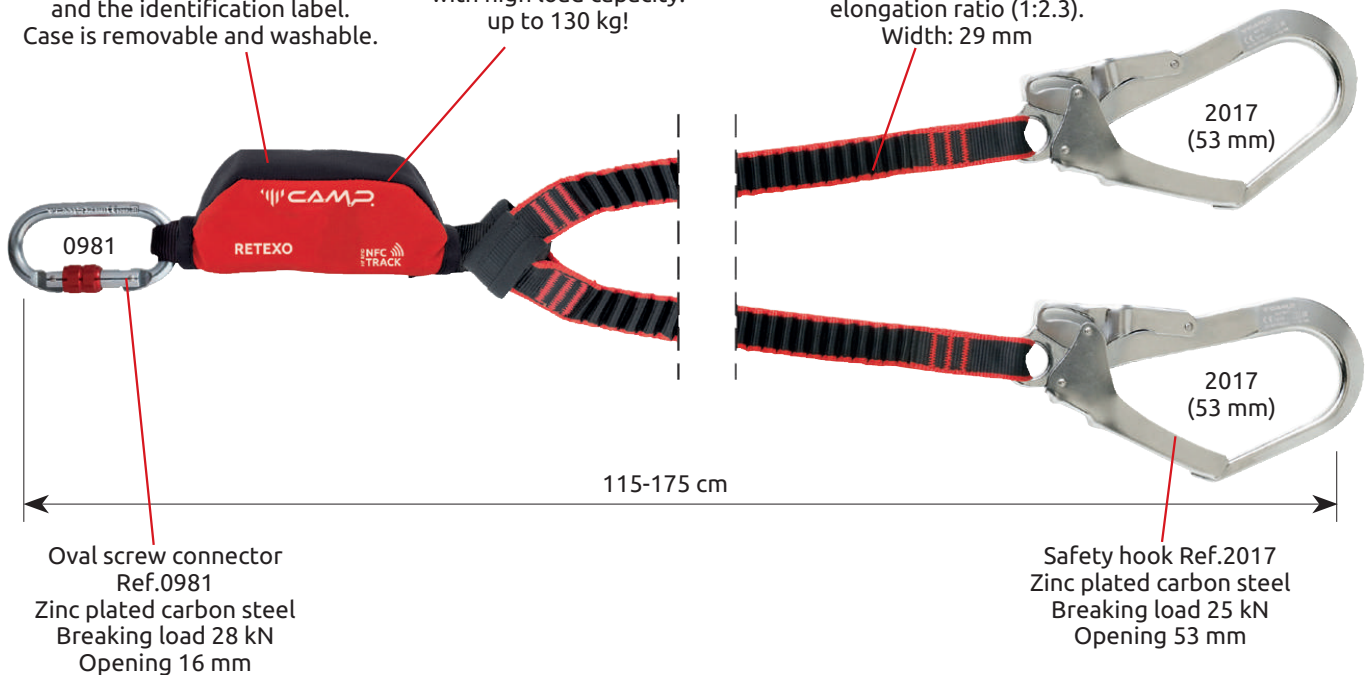

Oval screw connector  
Ref.0981  
Zinc plated carbon steel  
Breaking load 28 kN  
Opening 16 mm


Safety hook Ref.2017  
Zinc plated carbon steel  
Breaking load 25 kN  
Opening 53 mm

Ref.	Product name	Weight		Strength	Working load Maxx	CE			
		g	oz	kN	kg				
7050201	RETEXO REWIND DOUBLE + 0981 + 2x2017 115-175 cm	1500	52.9	15	130	EN 355	PPE-R/11.074		

Case with zip closure for easy inspection of the fall indicator and the identification label.  
 Case is removable and washable.  
 Equipped with NFC TRACK tag for digital identification.




### CE LABEL

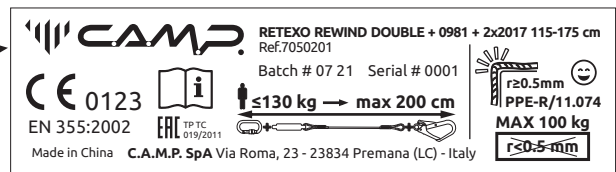

One label with all the information.

### FALL INDICATOR LABEL

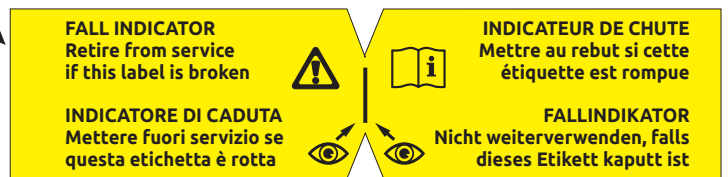

Retire from service if this label is broken

**A**

**Ha**  
Clearance distance below the anchor point (m)

		Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg				
Ha	Total length of the lanyard (m)	Fall factor				Ha	Fall factor			
		0	1	2	0		1	2		
1,20	1,20	3,70	4,10	4,50	1,20	3,70	4,25	4,80		
1,40	1,40	3,90	4,35	4,80	1,40	3,90	4,50	5,20		
1,50	1,50	4,00	4,50	5,00	1,50	4,00	4,65	5,40		
1,60	1,60	4,10	4,65	5,20	1,60	4,10	4,80	5,60		
1,80	1,80	4,30	4,90	5,45	1,80	4,30	5,10	5,90		
2,00	2,00	4,50	5,15	5,70	2,00	4,50	5,40	6,20		

**B**

**HF**  
Clearance distance below the user's feet (m)

		Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg			
HF	Total length of the lanyard (m)	Fall factor		HF	Fall factor				
		0	2		0	2			
2,00	2,00	6,20	6,70	2,00	6,70				

**C**

**B**  
Extension of the energy absorber (m)

		Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg				
B	Total length of the lanyard (m)	Fall factor				B	Fall factor			
		0	1	2	0		1	2		
0,40	1,20	0,40	0,80	1,20	0,55	1,10				
0,45	1,40	0,45	0,90	1,40	0,60	1,30				
0,50	1,50	0,50	1,00	1,50	0,65	1,40				
0,55	1,60	0,55	1,10	1,60	0,70	1,50				
0,60	1,80	0,60	1,15	1,80	0,80	1,60				
0,65	2,00	0,65	1,20	2,00	0,90	1,70				

C.A.M.P. presents in this catalog a **complete solution for the digital management of PPE**, both for allocation to users and for periodic inspections: the **NFC TRACK hardware tags on the products** work seamlessly with the **G.T.S. - Gear Tracking System software** to make the system very intuitive and easy to use.

**NFC TRACK chips are installed on many C.A.M.P. products** (harnesses, helmets, Retexo lanyards). They **can also be attached directly on any PPE** by the user, so that the user can assign the PPE data to the chip by means of the C.A.M.P. G.T.S.

**NFC (Near Field Communication) technology** is now present on most smartphones and used every day for smart payments. Today, it also represents the future for the individual identification of products.

The **HF RFID** (High Frequency Radio Frequency Identification) communication system on which NFC is based allows the C.A.M.P. NFC TRACK to be easily read using any latest generation smartphone or for professionals using a PC reader.



**NFC TRACK chip installed!**



## - G.T.S. - GEAR TRACKING SYSTEM

G.T.S. allows professionals to easily manage PPE both via the smartphone app (available on Play Store and Apple Store) and from a PC via the web app.

Two different packages allow for carrying out periodic inspections and also for managing the company allocation of PPE to its employees.

The database of **G.T.S.** includes the **technical information of all C.A.M.P. products** for work at height and a **large number of other products** posted by other users of the community with publicly available information.

